


product portfolio

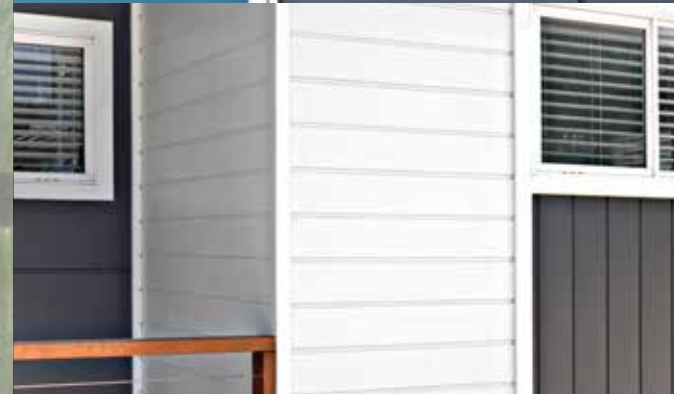

What is Weathertex?

Weathertex is a manufacturer of natural Australian hardwood Weatherboards and Architectural Panels. Weathertex's products are made in Raymond Terrace, NSW, at the original 1939 factory. Massive investment in production upgrades, computerization and painting facilities have been made since Weathertex's introduction, in 1962.

100% Australian owned and manufactured, Weathertex only uses certified state forest or private hardwoods sourced within 150km of the factory. The logs are then chipped, pulped and pressed with 3% natural wax to make Australian timber products that are natural and perfect.

Proud and determined to be environmentally sustainable, Weathertex has worked hard to ensure its products have a better than zero carbon footprint on the environment.

Have you heard of the Programme for the Endorsement of Forest Certification, or PEFC? The Programme is an international non-profit, non-governmental organization dedicated to promoting Sustainable Forest Management through independent third-party certification.

PEFC works through the entire forest supply chain promoting good forest practices and ensuring that timber and non-timber forest products are produced following the highest ecological, social and ethical standards. The PEFC logo enables customers and consumers to identify products from sustainably managed forests.

As an umbrella organization, PEFC endorses national forest certification systems developed through multi-stakeholder processes and tailored to local priorities and conditions. In Australia, the PEFC - endorsed national certification system is the Australian Forestry Certification Scheme, which is underpinned by AS4707 AFCS Chain of Custody Standard and AS4708 Australian Forestry Standard.

With over 30 endorsed national certification systems and more than 240 million hectares of certified forests, PEFC is the world's largest forest certification system.

Weathertex undergoes rigorous third-party assessment against PEFC's Sustainability Benchmarks to ensure consistency with international requirements. With a continuing commitment to the PEFC scheme, Weathertex supports the sustainable management of Australian forests, promotes Australian produced and made products while supporting the work force in Australia.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

For further information please go to <http://www.pefc.org/>



Mason Gun



Infrared Curing Oven



Want a better
than zero
carbon
footprint

Timber is 100% sustainable.

Trees remove greenhouse gas from the atmosphere which remains locked up in Weathertex.

Weathertex' products store more carbon during its life span than what is released during the manufacturing process.

Responsible forestry practice significantly improves the carbon intake of a forest over time.


Sustainably thinning forests allows young trees to grow, which in turn promotes biodiversity – this is what Weathertex does.

Furthermore, the ability for a forest to remove carbon dioxide from the atmosphere diminishes over time.

100% natural: 97% timber and 3% natural wax, for water repellency.

Have ours.

- **Low maintenance** – on average, repainting is required every 15 years.
- **Value for money** – lightweight product, single person installation.
- **Australian made and owned** – proudly made in Newcastle, NSW.
- **Environmentally friendly** – better than zero carbon footprint.
- **Easy to install** – only standard carpenter's tools are required.
- **Warranty** – will not rot, split or crack for 25 years.
- **Longevity** – natural Australian timber, made to last.
- **Safe** – can be sawn or cut indoors.
- **Quicker to install** – direct fix to frame.

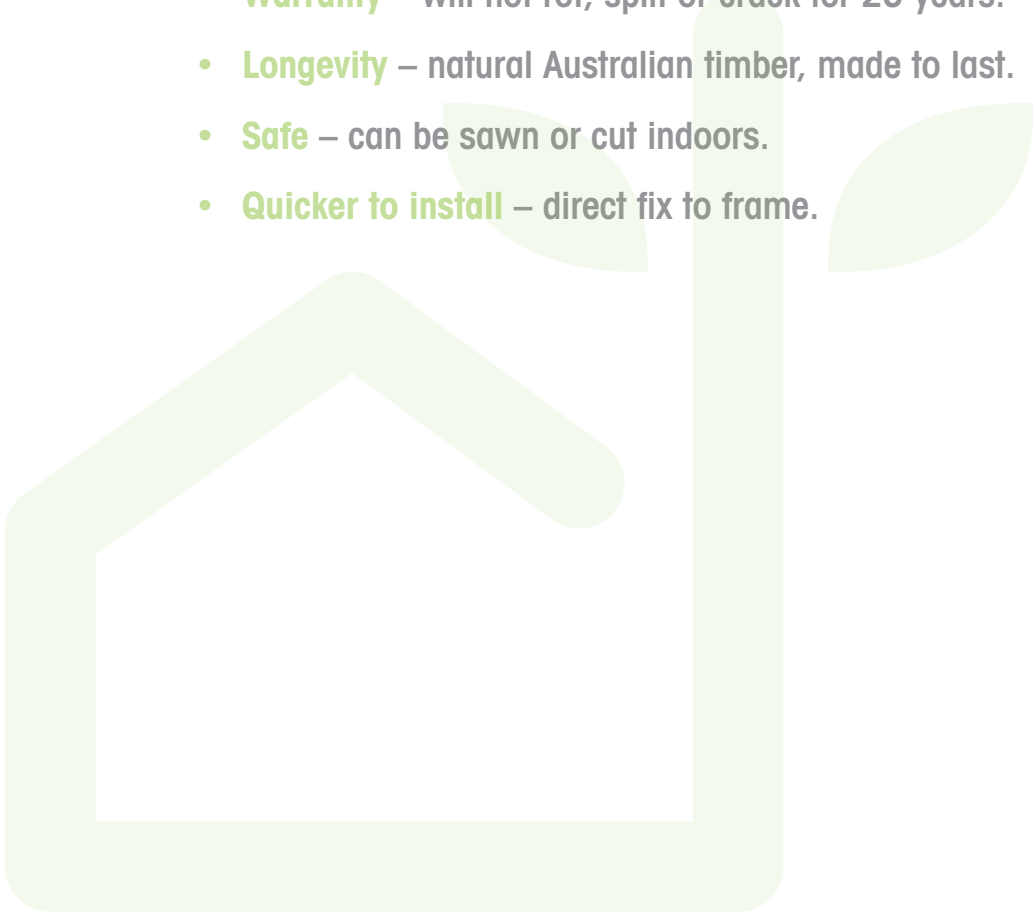

Weathergroove Smooth



* Refer to the Weathertex Manufacturer's Warranty Conditions



Selflok Weatherboards

A favourite in the Weatherboards family, Selflok Weatherboards have the simplest self-locking system, which allows every board to align perfectly and without effort. The precise routing gives the product that beautiful and unique ship lapped profile that makes it the first choice for many. Complete a perfect job with the Weathertex concealed joining system, to get the seamless lines that the Selflok range offers.

New to the Selflok range are the increasingly popular Selflok Ecogroove Weatherboards. The Selflok Ecogroove Smooth is the ideal choice for a smooth-to-touch finish, whereas the Selflok Ecogroove Woodsman provides the distinct wood grain texture of natural timber. Both are available in a range of different sizes.

Advantages

- The unique lapping system allows a quick, flawless installation.
- It is a durable and lightweight product.
- Requires only standard DIY cutting tools.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



Selflok Texwood Smooth




GJ Gardner Homes
Selflok Ecogroove 300 Smooth




* Refer to the Weathertex Manufacturer's Warranty Conditions



SELFLOK
ECOGROOVE 150 ^
SMOOTH
Width: 300mm




SELFLOK
ECOGROOVE 150 ^
WOODSMAN
Width: 300mm



SELFLOK
ECOGROOVE 300 ^
SMOOTH
Width: 300mm




SELFLOK
ECOGROOVE 300 ^
WOODSMAN
Width: 300mm



SELFLOK MILLWOOD
SMOOTH
Width: 300mm



SELFLOK MILLWOOD
RUFF-SAWN
Width: 300mm



SELFLOK TEXWOOD
SMOOTH
Width: 300mm



SELFLOK OLD COLONIAL
SMOOTH
Width: 300mm

*All Weatherboards are 3660 mm in length and 9.5 mm in thickness. ^ Refers to groove spacing.



Primelok Weatherboards


Our exclusive Weathertex Primelok fixing system ensures a perfect and easy alignment of the boards, reducing installation time by up to 20%. The overlapping of each board conceals fixings, resulting in smooth, clean, straight lines.

Primelok Weatherboards are suitable for gun nailing installation, and pre-primed as a standard feature.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



* Refer to the Weathertex Manufacturer's Warranty Conditions




PRIMELOK SMOOTH

Width: 200mm




PRIMELOK RUFF-SAWN

Width: 200mm



PRIMELOK WOODSMAN

Width: 200mm




PRIMELOK BRAIDWOOD SMOOTH

Width: 200mm



PRIMELOK BRAIDWOOD RUFF-SAWN

Width: 200mm




PRIMELOK FEDERATION SMOOTH

Width: 170mm



PRIMELOK FEDERATION RUFF-SAWN

Width: 170mm



PRIMELOK SHADOWWOOD SMOOTH

Width: 170mm

* All Weatherboards are 3660 mm in length and 9.5 mm in thickness.



Classic Ruff Sawn Weatherboards

Classic Weatherboards

Weathertex Classic Weatherboards are truly an Australian classic. Choose Smooth or Ruff-Sawn surface finishes to create a clean, smart-looking home.

Weathertex Weatherboards are designed to blend beautifully with alternate building materials such as brick, render, stone and, of course, Weathertex Architectural Panels, providing limitless design and decorative solutions and applications.

Weathertex will complete your home with a high quality, highly durable and low maintenance product.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



CLASSIC SMOOTH
Width: 200 or 300mm



CLASSIC RUFF-SAWN
Width: 200 or 300mm



CLASSIC RUSTICATED SMOOTH
Width: 200mm



CLASSIC RUSTICATED RUFF-SAWN
Width: 200mm

*All Weatherboards are 3660 mm in length and 9.5 mm in thickness.



Weathergroove

Weathergroove is the largest panel product available in the Australian market. This vertically grooved panel is ideal for covering large areas in a short time. It is environmentally friendly, versatile and possibilities are endless.

In order to further improve Weathergroove, an exclusive joining system has been designed to clip onto the rebated edges of each panel, blending in perfectly with each Weathergroove sheet for a continuous panel finish. Weathergroove also provides a safe and reliable means of structural bracing. Please see the Weathertex Installation Guide for details.

Advantages

- Off-stud joining system
- Quick installation
- No silicon or adhesives required for installation

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.




Weathergroove Woodsmen




Weathergroove Ruff-Sawn




* Refer to the Weathertex
Manufacturer's Warranty
Conditions



WEATHERGROOVE
SMOOTH



WEATHERGROOVE
RUFF-SAWN



WEATHERGROOVE
WOODSMEN

WEATHERGROOVE SIZES

Groove spacing: 150mm

3660 x 1196mm 2745 x 1196mm
2440 x 1196mm

Thickness: 9.5mm



Rubix Panel

Rubix Panel is the newest and easiest paneling system to hit the market. Rubix Panel is a self-locking Architectural Panel product available in square or rectangular panels designed to be joined on or off-stud.

Rubix Panel provides unprecedented flexibility and ease of installation. There is no need to pre-plan the stud layout and no joining accessories are required.

Rubix Panel is a revolutionary product, eliminating the building puzzle of external and internal matrix style applications.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



Macquarie Life Church
Rubix Panel Smooth



Rubix Panel Smooth



Rubix Panel Smooth



RUBIX PANEL
SMOOTH



* Refer to the Weathertex
Manufacturer's Warranty
Conditions

RUBIX PANEL SIZES

1200 x 1200mm

1200 x 900mm

Thickness: 9.5mm



Natural Woodsman

The new Natural Woodsman range is a natural (unprimed) board which provides a unique appearance, with the characteristics and looks of raw, undressed timber. The woodsman surface is pressed to create a woodgrain effect. Its rough, deep cut pattern shows all the knots, cracks and imperfections of natural timber. It can be left to weather naturally or be stained.

When the Natural Woodsman surface is oiled, the look of fresh brown timber is maintained. When allowed to weather naturally, the depth of colour will vary, subject to location and sun exposure.

Weathertex's natural finished products are covered by a 7 year warranty not to rot, split or crack. Please see the warranty section of the Weathertex website for full details.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



Jodie Dixon Architecture
Selflok Ecogroove 150 Natural Woodsman




* Refer to the Weathertex
Manufacturer's Warranty
Conditions



CLASSIC
WALL SHINGLES
Length: 1195mm
Width: 225mm



SELFLOK ECOGROOVE
150 ^ NATURAL
Width: 300mm



SELFLOK ECOGROOVE
300 ^ NATURAL
Width: 300mm



SELFLOK VGROOVE
150 ^ NATURAL
Width: 300mm



SELFLOK VGROOVE
300 ^ NATURAL
Width: 300mm



WEATHERGROOVE
NATURAL
3660 x 1196mm



EXTERIORBOARD
NATURAL
3660 x 1220mm

* All Weatherboards are 3660 mm in length and 9.5 mm in thickness. ^ Refers to groove spacing



Peter Downes Design
Selflok Millwood Smooth



Selflok Millwood Smooth



Classic Rusticated Smooth



Dickson Designs Pty Ltd
Selflok Ecogroove 300 Smooth



Weathergroove Smooth

ExteriorBoard

ExteriorBoard is one of the most durable and versatile type of panel available. The possibility of both vertical and horizontal express jointing lends flexibility to the pattern of your choice. Whether a modern architecturally designed home or a large commercial project, the decorative applications are unlimited.

Exteriorboard is an ideal choice when facing lightweight constraints. It complies with the requirements set by the External Hardboard in AS/NZS 1859.4:1997; it is a strong and robust product, yet lightweight and the large size panels make installation quick and easy.


Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



Exteriorboard Smooth



* Refer to the Weathertex
Manufacturer's Warranty
Conditions



EXTERIORBOARD
SMOOTH



EXTERIORBOARD
WOODSMAN
(Available in 3660mm only)

EXTERIORBOARD SIZES

3660 x 1220mm 2745 x 1220mm
2440 x 1220mm

Thickness: 9.5mm



High Impact Board Smooth

High ImpactBoard

The High ImpactBoard, by Weathertex, is a product made from sustainable Australian hardwood. It is a lightweight product covered by the Weathertex's 10 year warranty*, a testament to its quality and performance.

The confidence to specify High ImpactBoard for internal lining applications that have to endure high performance conditions is based on the fact that this Weathertex board is extremely durable and impact resistant. This is why it complies with the requirements of AS/NZS 1859.4:1997. The minimum density rating of the High ImpactBoard is 1025kg / m³.

High ImpactBoard durability makes it the best choice for:

- wall and façade linings
- exhibition buildings, sports facilities and entertainment centers linings
- school halls
- decorative linings in homes and commercial premises

All high ImpactBoard products are pre-primed, reducing finishing costs and time spent on installation. Just like the rest of the Weathertex range, High ImpactBoard is an environmentally friendly product that can be fixed with a variety of techniques, including gun nailing.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.




High Impact Board Smooth



High Impact Board Smooth



OTS Architecture,
Impact Board Smooth

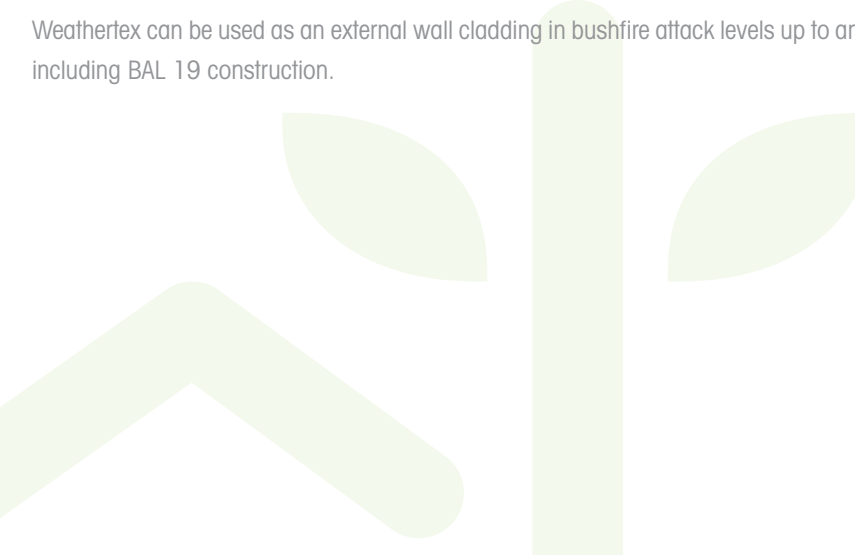

* Refer to the Weathertex
Manufacturer's Warranty
Conditions



HIGH IMPACTBOARD SIZES

3660 x 1220mm

2745 x 1220mm

2440 x 1220mm

Thickness: 9.5mm



Stylish Concepts Pty Ltd,
Selflok Old Colonial Smooth



Weathergroove Ruff-Sawn



Weathergroove Natural Woodsman



Selflok Millwood Smooth and Primelok Classic Smooth



Classic Smooth 200



Shoal Bay Holiday Park
Unitplan Group
Selflok Millwood Ruff-Sawn



Holondo Homes,
Classic Smooth 200 and Weathergroove Ruff Sawn



OTS Architecture,
Exteriorboard / High Impact Board Smooth



Weathergroove Ruff Sawn



Jodie Dixon Architecture,
Selflok Ecogroove 150 Natural Woodsman



Peter Downes Design,
Selflok Millwood Smooth



Peter Downes Design,
Weathergroove Smooth







Weathergroove Smooth













Weathergroove Ruff Sawn

Weathertex Accessories Range

ACCESSORIES	LENGTH (mm)	SUITED TO:	
Traditional Joiners	300, 200 and 170	Classic, Selflok and Primelok	
Concealed Joiners	300, 200 and 170	Classic, Selflok and Primelok	
PVC Deep Channel Joiners	3660	ExteriorBoard High ImpactBoard	
Weathergroove Vertical Joiners	3660, 2745, 2440	All Weathergroove Panels	

Trimtec Aluminium Accessories

ACCESSORIES	LENGTH (mm)	SUITED TO:	
Aluminium Z Flashing	3660	Weathergroove, ExteriorBoard, High ImpactBoard. Other products as required	
Aluminium Vertical T Joiner	3660	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard	
Aluminium Deep Channel Joiner	3660	ExteriorBoard, High ImpactBoard	
Aluminium End Stop	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard Classic, Primelok	
Traditional Internal Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard Classic, Primelok	
Traditional External Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard Classic, Primelok	
LF Internal Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard Classic, Primelok	
LF External Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard Classic, Primelok	
Window Surround	Small 3660 Large 3660	Selflok, Weathergroove, ExteriorBoard, High ImpactBoard Classic, Primelok	
Window Corner		Suited to finish corner junctions between window surrounds and LF corners	

This is a brief listing only, for a more comprehensive list and details on our accessories range please visit www.weathertex.com.au and view online or refer to our Weathertex Installation Guide.



Weathergroove Smooth



OTS Architecture,
Exteriorboard/High Impact Board Smooth.



weathertex.com.au Ph: 1800 040 080 Fax: 1800 647 926



* Refer to the WeatherTex Manufacturer's Warranty Conditions

WeatherTex® is made in Australia by WeatherTex Pty Ltd ABN 67 084 713 986 Masonite Road, Raymond Terrace NSW 2324